

### General characteristics

e-Charger: Pole Pro  
 Colour: Black  
 Material: Anti-vandal steel  
 Weight: 55 kg  
 Display with recharge data visualisation\*1: 8" - 1.000 lumens  
 Mode 3 PWM control according to ISO/IEC 61851-1  
 RFID reader ISO/IEC 14443 A/MIFARE  
 MID meter differentiated by socket\*1  
 Electrical protections per socket: type A differential and 40A circuit breaker\*2  
 Operating temperature: -25° a 70°  
 Storage temperature: -40° a 70°

### Electrical characteristics

Connector type: Socket Type 2 / Shutter\*3  
 Grid type: 230V / 400V  
 Maximum recharging power: 7,3kW o 22kW (per socket)  
 Configurable current: from 6 to 32 Amps  
 Nominal frequency: 50Hz / 60Hz  
 Protection index: IP54 / IK10


### Composition of the product number

Model		POLEPRO
Number of output sockets	1	X1
	2	X2
Intensity	32A	32
Grid type	Single-phase	1
	Three-phase	3
Wallbox		W

#### Accessories\*4:

Resettable protection (per socket)	V2C-REARM-1
Differential single-phase Type B (per socket)	V2C-DIFB-M
Differential three-phase Type B (per socket)	V2C-DIFB-T
Transient and permanent surges (single-phase)	V2C-IGAYSBTYP-M
Transient and permanent surges (three-phase)	V2C-IGAYSBTYP-T


### Dimensions

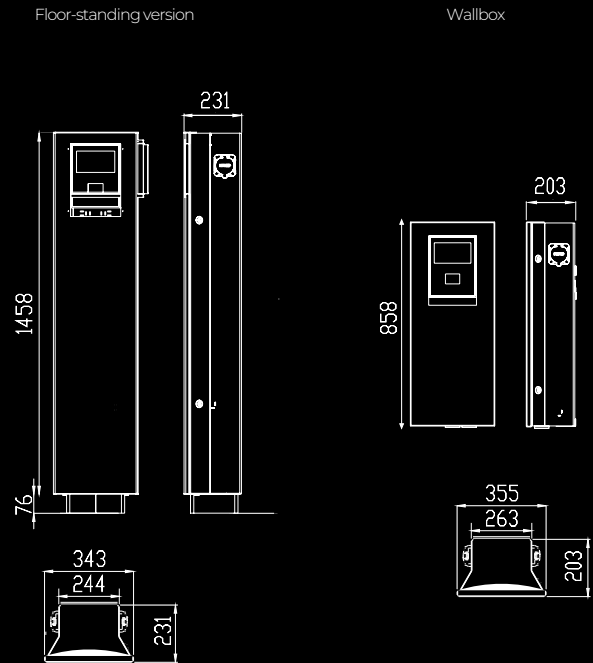

### Functional characteristics

User platform: Application y V2C Cloud portal\*1  
 Connectivity: Ethernet / WiFi / Bluetooth / 3G / 4G / 5G\*1  
 Communication: OCPP / Rest API Cloud / OTA\*1

### POLEPRO-X2-32-3-W

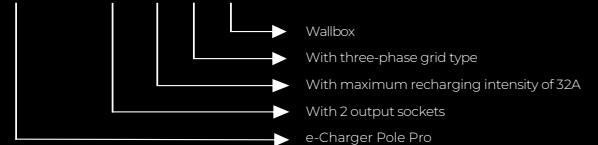

\*1 On V2C Cloud models  
 \*2 NF in French market  
 \*3 French market  
 \*4 Optional