

General characteristics

e-Charger: Trydan Pro
 Color: Black
 Material: Polycarbonate MVR
 Maximum weight: 7kg
 Charging Cable length: 5 m / 10 m
 Charging Cable type: Flat / Spring
 Operating temperature: from -25° to 50°
 Storage temperature: from -40° to 70°
 Display: 2,6"
 RGB lighting depending on state of charge

Electrical characteristics


Conector type: Type 2 / Socket
 Voltage: 230V / 400V
 Maximum power output: 7,4kW or 22kW*¹
 Adjustable current: 6 - 32A (per phase)
 Nominal frequency: 50Hz / 60Hz
 Protection class: IP54 / IK10
 Residual current detection: AC 30mA / DC 6mA*¹
 MID meter*¹

*¹ Optional

Part number structure

Model	TRYPRO	
Intensity	32	
Grid type	Single-phase	1
	Three-phase	3
Cable type	Flat	5m L5
		10m L10
	Socket	S
Protections	P	
Schuko	SC	
Accessories:		
Leak detector	V2C-F	
Cable support	V2C-SOP	
Stand	V2C-PED	
Single-phase MID meter	V2C-MID-1	
Three-phase MID meter	V2C-MID-3	

Dimensions

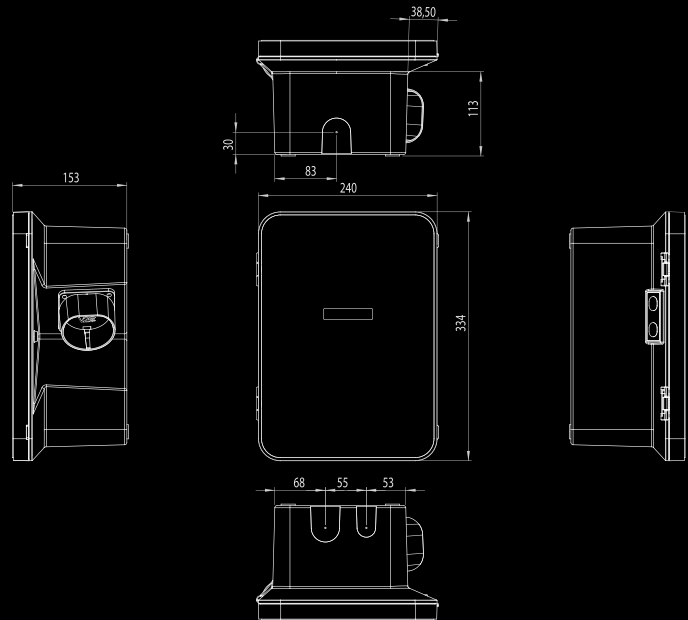

Functional characteristics

User platform: APP & V2C Cloud portal
 Connectivity: WiFi / Bluetooth / Ethernet / 4G*²
 Communication: OCPP / Rest API Cloud
 Configuration with smart devices: Alexa, Google Home
 RFID

*² Includes SIM card

TRYPRO32-1-L5-P-SC

